


Arch 2 Electronic Basin Sensor Faucet 5790-S0-81CP



unit: mm[inch]

1. Infrared Sensor Automatic Detection
2. Safety Guard: Valve off if water flowing over 60sec.
3. Automatically detect the environment, adjust the sensor, and have anti-interference function.
4. Inner filter prevent the blockage of sensor valve.
5. Power supply specifications: input voltage 100~240V AC, 50Hz, 0.2A. Output voltage 6V DC, 600mA
6. Normally powered by the power supply, it automatically switches to battery power when power is off.
7. Power Source: Alkaline Battery AA x 4, DC6V(1.5V x 4)
8. Battery life test: about 300,000 alkaline batteries; about 100,000 carbon zinc batteries.
9. Flush Mode: Water start flowing if valid sensing around 0.5sec~1.0sec
10. Low power prompt: When battery power is low, red indicator light will be flashed for prompting battery replacement.
11. The faucet valve can stand the pressure from 0.5 to 6 kgf/cm²
12. Brass with Chrome plated meets ASTM-SC2 standard; 5 years guarantee.
13. Stainless steel braided hose with SANTOPRENE tube (meets NSF approval), can be stood 15Kg/cm² water pressure and 120 °C heat.
14. Material for parts contacted with water: Lead-Free Brass C46400

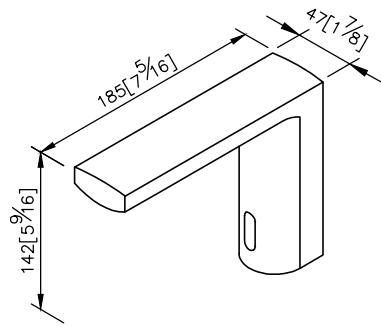