

INSTALLATION INSTRUCTIONS

Pressure Balanced Shower Single Handle 壓力平衡閥單把手淋浴組安裝說明

NOTE : Unscrew the **Handles** and **Cap** from the **Balance Valve** First. Then using the **Plastic Guard** protect the external threads while installation. (Fig.1)

注意從包裝盒中取出：安裝前，先將把手與把閥體蓋從閥體鬆開取下。然後使用塑膠保護蓋保護閥體。（圖.1）

1. Install Valve and Shower Lines (Fig.2)

安裝閥體與淋浴供水管線（圖.2）

Install with "1" on valve pointing upward. **a/** Connect hot and cold water supply lines. **b/** Install shower line, use $\frac{1}{2}$ " plug place in upper opening if not used, compound or tape all connections. **c/** Assemble $\frac{1}{2}$ " tub spout pipe and $\frac{1}{2}$ " pipe elbow into bottom of the valve.

安裝請參照本體上 "1" 方向朝上面的指示，並使牆面與保護蓋對齊。 **a/** 連接冷熱水供水管線。 **b/** 裝置淋浴供水管線，如果暫時不予使用，請用 $\frac{1}{2}$ " 管塞住出水口處。 **c/** 先將所有接頭塗上管牙膠或包覆止洩帶，再組裝 $\frac{1}{2}$ " 水管上端到牆壁內本體上，同時並組裝 $\frac{1}{2}$ " 彎頭到 $\frac{1}{2}$ " 水管的下端。

2. Install Showerhead (Fig.3)

安裝淋浴噴頭（圖.3）

Place **Showerhead Flange** over the thread-end of **Showertube**, apply pipe compound to **Showertube** and $\frac{1}{2}$ " elbow, install **Showertube** into elbow, Tighten the **Showerhead** by wrench.

將法蘭蓋從淋浴管的接牆壁端套入，再將其接牆牙端與牆內 $\frac{1}{2}$ " 彎頭內牙，塗上管牙膠或包覆止洩帶，接好鎖緊，最後裝上淋浴頭，用扳手鎖緊，即可完成淋浴噴頭安裝。

3. Remove the Plastic Guard and set Mixture Temperature Range (Fig.4)

移除塑膠保護蓋並設定混合龍頭溫控範圍（圖.4）

First remove the **Plastic Guard**. **a/** Make sure the **balance valve** is on position of "off" before adjusting the **thermostatic controller (red ring)**. **b/** pull out the **thermostatic controller (red ring)**. The "-" and "+" are from cold temperature to mid-high or highest temperature. **c/** push the red ring down to finish temperature setup process.

首先移除塑膠保護蓋。 **a/** 調整溫度調整固定環（紅色套環）之前，必須確認平衡閥在關掉的位置。 **b/** 拔出溫度調整固定環（紅色套環），- 到 + 是由冷溫度到中溫度或高溫度。 **c/** 套押入紅色套環在選定的溫度範圍，完成調整溫度的步驟。

4. Turn the Stops on (Fig.5)

打開內控冷熱開關（圖.5）

Turn **Integral stops**, both hot and cold sides, Counter-Clock-Wise to open incoming water flow. Turn handle to full mix position. Let lines flush from tub spout for three minutes, check for leaks, adjust water mixture temperature as needed.

反時鐘方向，打開內控冷熱左右開關，進水，調整中央控制閥把手到全開出水位置，經上方噴水排放數分鐘後，再適當使用內控冷熱開關調整出水溫度與出水量。

6. Assemble Faceplate and Handle (Fig.7)




組合面板與把手（圖.6）

Carefully slide **Faceplate** over valve stem, and press it firmly against finished wall. Use **Long Screws** provided to secure **Faceplate** against the valve. Installs **Cap** and **Handle** on the stem and tighten it with a set screw.

將面板蓋於閥體，並使用螺絲固定面板。安裝閥體上蓋與把手，然後使用螺絲固定把手。

PATENT NUMBER:

專利號碼:
000127162-0004
D100483
D090638
GB 3017974
ZL 200430065122.6
US D511,807 S

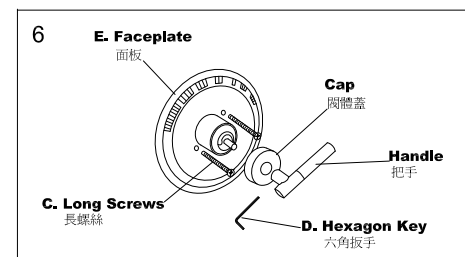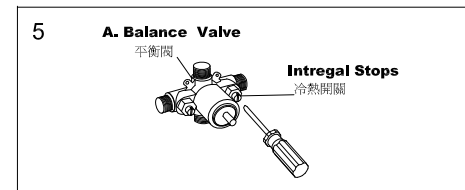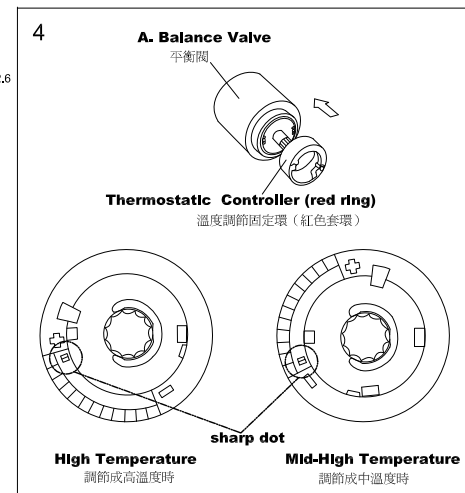

FIXING CONTENTS

組配件內容

<p>A. Balance Valve (with Hand) × 1 平衡閥本體（含把手）</p>	<p>B. Plastic Guard × 1 塑膠保護蓋</p>	<p>C. Long Screws × 2 長螺絲</p> <p>D. Hexagon Key × 1 六角扳手</p>	<p>E. Faceplate × 1 面板</p>	<p>F. Showerhead (with Flange) × 1 淋浴頭（含法蘭蓋）</p>
---	--	--	---------------------------------------	---