


# INSTALLATION INSTRUCTIONS

Multi-Function Floor Drain

地漏安裝說明

PATENT NUMBER:

專利號碼:  
ZL201002585439.2

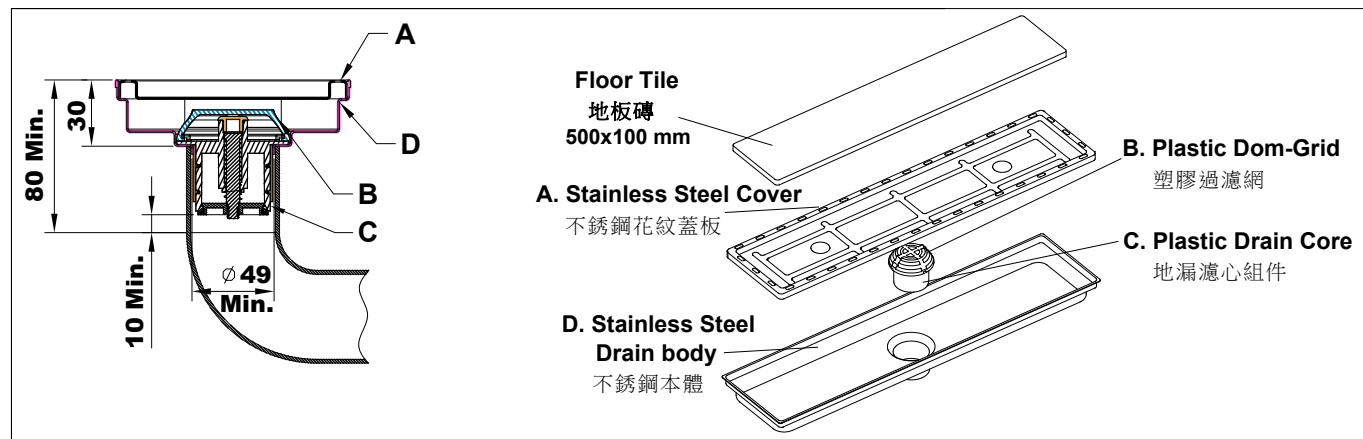

## 安裝方法 Installation

1. Remove the **Stainless Steel Cover, Plastic Dom-Grid, and Plastic Drain Core** from the **Stainless Steel Drain body**.  
將蓋板、塑膠過濾網及濾心組件，從不銹鋼體本體取出。
2. Apply the cement or other sealant around the bottom and the flange of **Stainless Steel Drain body**. Place the **Stainless Steel Drain body** into the hole on the floor and level the **Stainless Steel Drain body**. Notice: The drain surface should be lower than the floor.  
將不銹鋼本體的下緣塗上水泥或適量的密封劑。將不銹鋼本體置入挖好的地漏坑內，排水口與下水道口對中，壓緊並抹平水泥。  
注意：平面應稍低於地面少許。
3. Insert the **Floor Tile** to the **Stainless Steel Cover**; apply the Silicon Sealant to fill the gap between the tile and the edge of the **Stainless Steel Cover**. Notice: Do not apply or leak the sealant to the drain hole; it might cause the obstruction of water flow.  
將切割好的500\*100mm地板磚放入蓋板的地板磚放置區內，然後使用玻璃膠塗在地板磚的四周及底部與蓋板黏在一起，並將間隙填平，清除多餘的膠。注意：膠不可進入流水孔，防止阻塞減少流量。
4. Please note that the tile should be at the same level with or higher than the **Stainless Steel Cover** after step 3 to preventing water clogging.  
地板磚與蓋板黏在一起時，注意地板磚正面要與蓋板平面平齊或高於蓋板平面，以防止積水。
5. Replace **Plastic Drain Core, Plastic Dom-Grid** and **Stainless Steel cover** into **Stainless Steel Drain Body**.  
將蓋板、過濾網及濾心組件放入不銹鋼體本體內。
6. Remove any excess cement or sealant.  
請將地板多餘的水泥或密封劑清除。

## 安裝注意事項 Installation Attention

1. Inquire with an agent if there is any install question.  
若安裝本產品有任何問題，請向專業人員詢問。
2. Make sure there is at least 10 mm working space from the bottom of **Plastic Drain Core** to prevent inactive drain function. (Please see Fig.1)  
確認地漏濾心組件底部至彎頭底部至少有10mm空間。(請參照圖示1)

## 維護方法 Maintenance

Maintenance 1: To clean the grid : please take out the plastic grid and put it back after it is cleaned.

當太多雜物阻塞濾網時，可按步驟1，取出部件清理，清潔後。按步驟3將各部件安裝好，重新使用。

Maintenance 2: To clean the core: please take out the plastic grid and then pull out the core. After clean it, put the core and the plastic back.


當自封蓋板結滿水垢影響密封時，可按步驟1，取出蓋板和塑膠過濾網後，將地漏濾心組件從不銹鋼本體鉤出清潔後，安裝好重新使用。

## 產品特點 Product Characters

1. Noise reduced , Qirtight & Beetle stopped , Multi - Function Check - sealing design.  
降低排水噪音，防下水道臭氣和阻止蟲類通行，多功能通止密封設計。
2. Made of SUS 304 Stainless Steel and Plastic for long operating life.  
使用 SUS 304 不銹鋼和塑膠材料製造，可供長久使用。

Floor Drain  
地漏

unit : mm

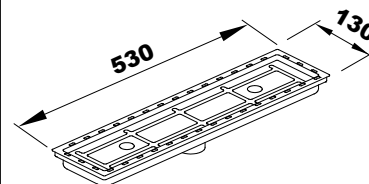

0306-54-79S1