
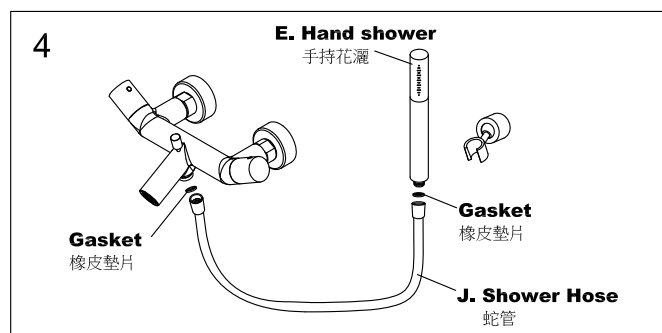
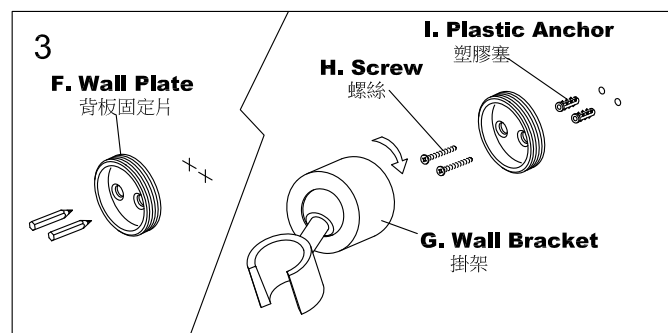
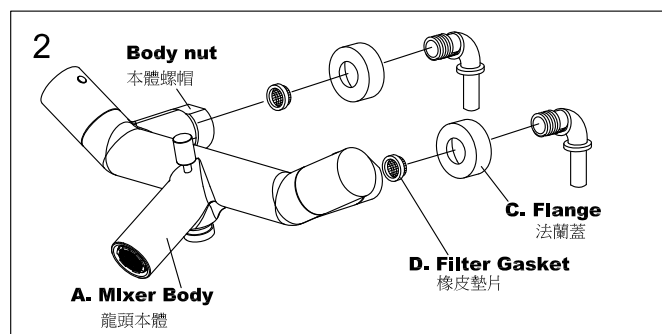


# INSTALLATION INSTRUCTIONS

## SHOWER MIXER

### 淋浴龍頭安裝說明

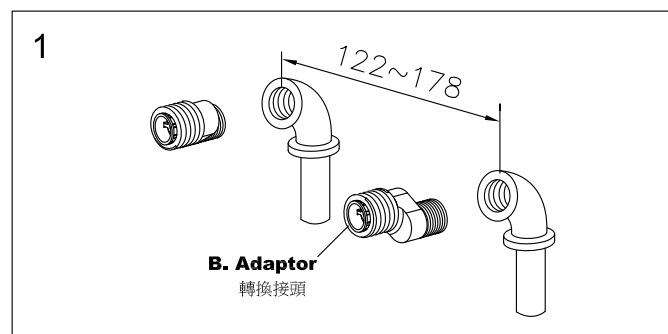

#### CAUTION : Prevent The Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

When finished installation, turn the valve on and run for 1 minute before using.

完成安裝後，需在使用前先把供水開關全開排水持續一分鐘。

- The available distance between two centers of wall water-outlet can be 122~178mm. Apply pipe compound or thread sealant tape to the thread of **Adaptor** 1/2" end, and screw it into wall water-outlet as Fig.1 shown.

凡牆壁上冷熱出水孔中心距離在122~178mm者，皆可適合安裝本產品。將轉換接頭1/2"牙塗上管牙膠或包覆止洩帶，再鎖入牆壁出水口。(圖.1)

- Cover **Flanges** onto both 3/4" end of **Adaptors**, insert **Gasket** into each body-nut and screw the body-nut onto **Adaptors** 3/4" end securely as Fig.2 shown.

將2法蘭蓋各別裝上轉換接頭的3/4"那邊，然後將墊片各別裝入本體螺帽，並且將本體螺帽鎖在轉換接頭3/4"那端鎖緊固定。(圖.2)

- Using **Wall Plate** as a template, mark and drill at proper position, and then Install **Wall Plate** on the wall with screws. Screw **Wall Bracket** onto **Wall Plate** and tighten it. Rotate the **Holder** to correct position as the Fig.3 shown.

先決定花灑掛架欲安裝之位置，利用背板固定片上兩孔用鉛筆畫兩個基準點，再使用6mm鑽頭於牆上記號鑽孔。將掛架背板固定於牆上之後，將掛架順時針鎖入背板至鎖緊。(圖.3)

- Connect **Shower Hose** with gaskets to **Mixer Body** and **Hand Shower** as Fig.4 shown.

將蛇管含墊片固定在龍頭本體與手持花灑。(圖.4)

## FIXING CONTENTS

### 組配件內容

