


INSTALLATION INSTRUCTIONS

Kitchen Faucet / Basin Faucet Installation Guide (Dual Fixing Bolts)

廚房龍頭 / 臉盆龍頭安裝說明(雙牙條)

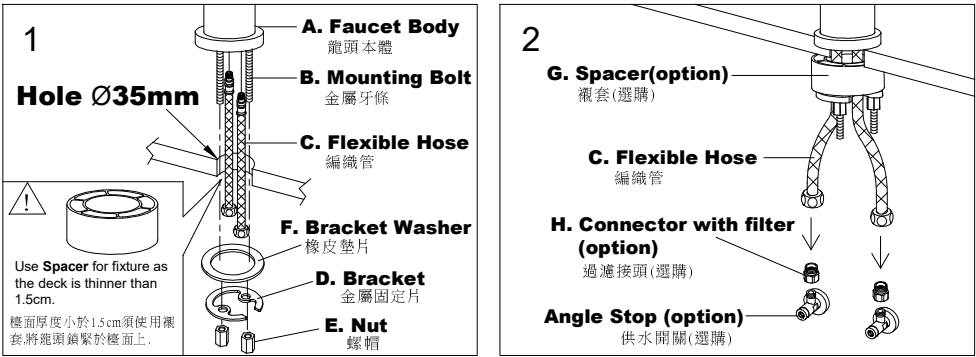

CAUTION : Prevent The Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

- a./ Turn the angle stops (water suppliers) on and run for 1 minute before connect supply hose (flexible hose) to faucet body. or b./
安裝編織管之前，先把供水開關全開排水一分鐘。或 b./
b./ Connect and tighten the faucet and angle stops with supply hose (flexible hose) to finish installation, then remove the aerator, fully turn on the hot and cold water valves on faucet and run for 1 minute, then turn off the water and reinstall the aerator.
把龍頭、供水開關及編織管接好並鎖緊之後，把起泡器移開，把熱水及冷水全部轉開一分鐘，然後把水關掉再把起泡器裝回去。


Use **Spacer** for fixture as the deck is thinner than 1.5cm.

檯面厚度小於1.5cm須使用襯套，將龍頭鎖緊於檯面上。

1. Screw **Mounting Bolt** into bottom of **Faucet Body**, insert **Flexible Hoses** through deck hole and screw into the bottom of **Faucet Body**, position **Faucet Body** on fixture and place **Bracket** with **Bracket Washer** and **Nut** onto **Mounting Bolt**, then tighten **Nut** securely.
將金屬牙條鎖緊固定於龍頭本體。同時，將編織管穿過洗臉盆(檯)洞口並且鎖入龍頭本體，從金屬牙條下方依序套入橡皮墊片、金屬固定片和螺帽，確認方向位置後，鎖緊螺帽固定龍頭即可。
2. Connect Hot & Cold **Flexible Hoses** to angle stops.
連接冷熱進水編織管到供水開關，確認完成安裝程序。

FIXING CONTENTS


組配件內容

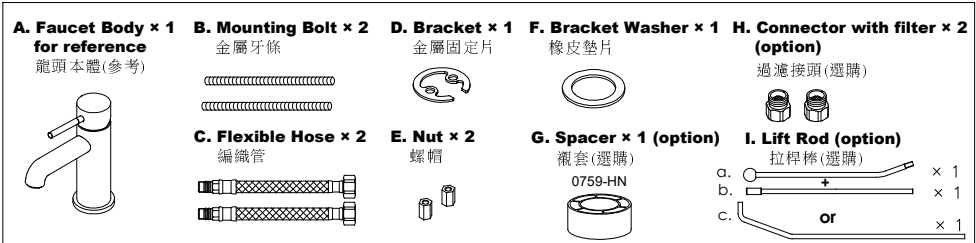

INSTALLATION INSTRUCTIONS

Kitchen Faucet / Basin Faucet Installation Guide (Dual Fixing Bolts)

廚房龍頭 / 臉盆龍頭安裝說明(雙牙條)

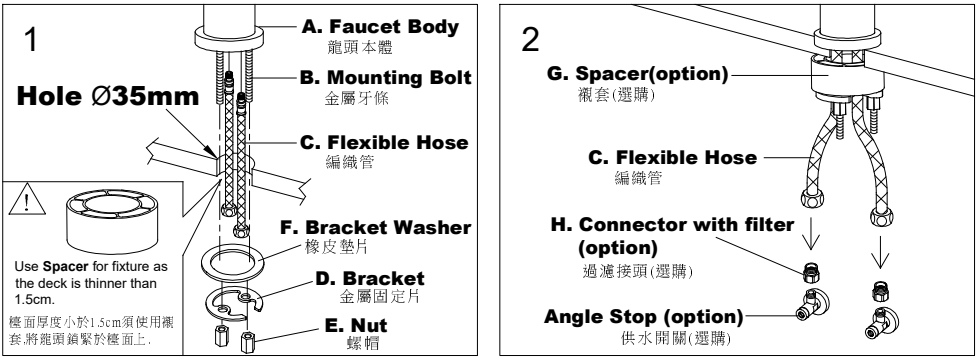

CAUTION : Prevent The Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

- a./ Turn the angle stops (water suppliers) on and run for 1 minute before connect supply hose (flexible hose) to faucet body. or b./
安裝編織管之前，先把供水開關全開排水一分鐘。或 b./
b./ Connect and tighten the faucet and angle stops with supply hose (flexible hose) to finish installation, then remove the aerator, fully turn on the hot and cold water valves on faucet and run for 1 minute, then turn off the water and reinstall the aerator.
把龍頭、供水開關及編織管接好並鎖緊之後，把起泡器移開，把熱水及冷水全部轉開一分鐘，然後把水關掉再把起泡器裝回去。

Use **Spacer** for fixture as the deck is thinner than 1.5cm.

檯面厚度小於1.5cm須使用襯套，將龍頭鎖緊於檯面上。

1. Screw **Mounting Bolt** into bottom of **Faucet Body**, insert **Flexible Hoses** through deck hole and screw into the bottom of **Faucet Body**, position **Faucet Body** on fixture and place **Bracket** with **Bracket Washer** and **Nut** onto **Mounting Bolt**, then tighten **Nut** securely.
將金屬牙條鎖緊固定於龍頭本體。同時，將編織管穿過洗臉盆(檯)洞口並且鎖入龍頭本體，從金屬牙條下方依序套入橡皮墊片、金屬固定片和螺帽，確認方向位置後，鎖緊螺帽固定龍頭即可。
2. Connect Hot & Cold **Flexible Hoses** to angle stops.
連接冷熱進水編織管到供水開關，確認完成安裝程序。

FIXING CONTENTS

組配件內容

