


INSTALLATION GUIDE


BASIN TABLE

枱面組安裝說明

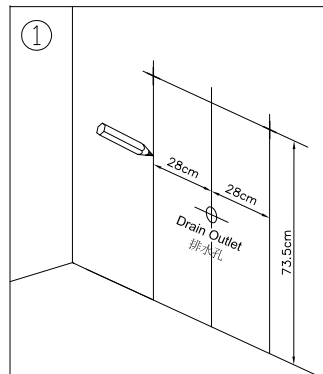


Mark two vertical dotted lines both 28cm(1.1") from the center of drain outlet and mark two drill centers as shown in figure ①. Using a pencil for wipe off easily.

用鉛筆在距離牆上排水孔左右各28公分處，畫上垂直線。

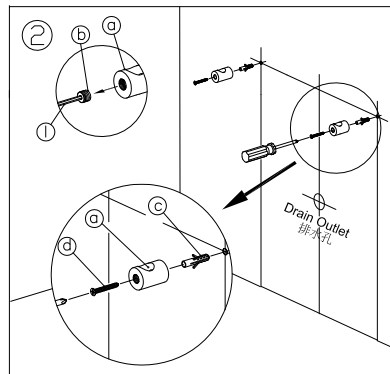


Using a 10mm bit, drill holes in the positions marked to a depth of 50mm, insert **Plastic Anchors** flush with wall. Unscrew the **Socket Plugs** off the **Wall-Mount Brackets** with attached **Hexagon Key**, then screw **Wall-Mount Brackets** with **Stainless Steel Wall Screws** to wall in position as shown in figure ②. Keep the big hole on **Wall-Mount Bracket** upward for Insert **Adjusting Holder** and hold up the **Tempered Table Glass**.

當安裝在水泥牆，使用10mm鑽頭，鑽孔深度5公分，用六角板手鬆開已鎖在平台後支架裡的內六角接頭。爾後，填入塑膠塞並使之齊平於牆面，將平台後支架以螺絲鎖在牆面上，如圖②。須保持平台後支架的洞口朝上，以便安裝可調整支撐架和玻璃平台。

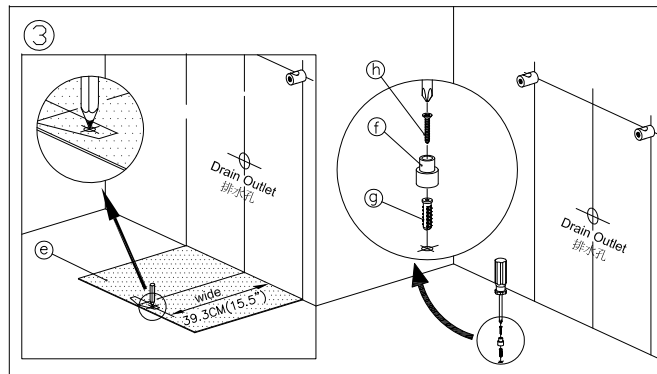


Mark table foot fixing-screw-hole position on floor with a pencil and **Paper Template** as shown in figure 3, be sure the **Paper Template** is pressed close to foot corner of the wall in position, the wide of reduce **Paper Template** if skirtboard existed on foot of the wall. Then screw **Fixed Post** on floor in position marked for fix **Wooden Table Foot**.

使用隨附的定位紙板，置放距離牆面39.3公分處，如圖3。並用鉛筆在定位紙板上畫上圖圈，作為鎖上固定基座的記號。在畫上記號前，必須注意牆角及地面是否平整且與牆面垂直，並再次確認記號間與牆面的距離。牆腳如有裝置腳踢板者，須請從39.3公分中自行扣除腳踢板厚度空間。鑽孔後填入塑膠塞使之齊平於地面，再以螺絲把固定基座鎖緊。

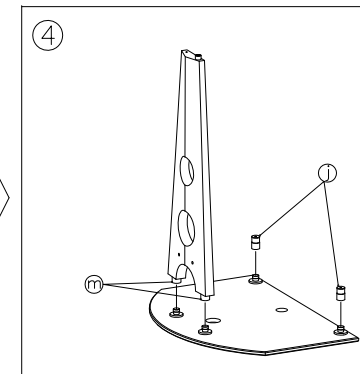


Screw **Adjusting Holders** onto rear screws that glued on the rear area of **Tempered Table Glass**, and meantime, connect **Wooden Table Foot** with **Tempered Table Glass** by twisting **Adjusting Pillars** onto front screws that glued on the front area of **Tempered Table Glass**.

將可調整支撐架與玻璃平台後方螺絲組合，同時，將腳板上方的支架套筒與玻璃平台前方螺絲組合。

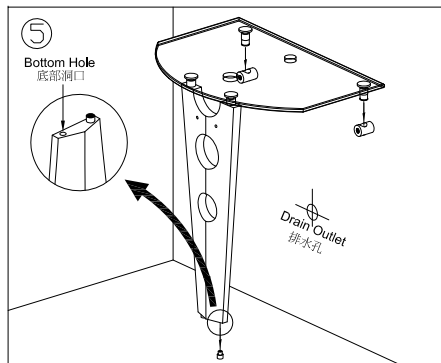


Place **Tempered Table Glass** with **Wooden Table Foot** in position, Insert **Adjusting Holders** into the big hole of **Wall-Mount Brackets** and fix the bottom-hole of **Wooden Table Foot** onto floor **Fixed Post**.

將可調整支撐架套進平台後支架裡，並將腳板底部的洞口，套進已鎖在地面上的固定基座。

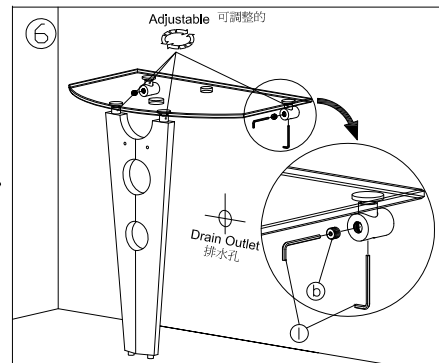


Level **Tempered Table Glass** by twisting **Adjusting Holders** and **Adjusting Pillars**, then screw and tighten **Socket Plugs** into **Wall-Mount Brackets** with attached **Hexagon Key**.

旋轉在玻璃平台的可調整支撐架和支架套筒，並調整桌面水平，然後用六角板手將內六角接頭在平台後支架內鎖緊。

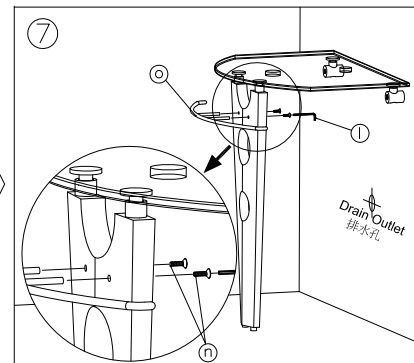

Install **Towel Rail** as shown in figure 7.

安裝弧形毛巾桿，如圖⑦即完成檯面組裝。

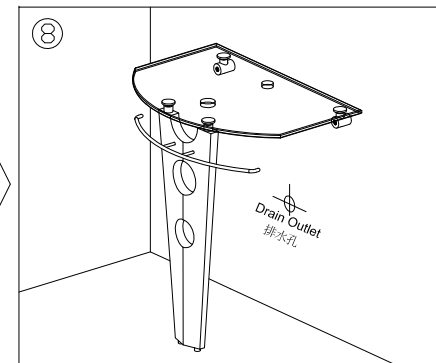

FIXING CONTENTS

組配件內容

① Wall-Mount BracketX2 平台後支架 	③ Plastic AnchorX2 塑膠塞 	⑤ Paper TemplateX1 定位紙板 	⑦ Plastic AnchorX1 塑膠塞 	⑨ Tempered Table GlassX1 玻璃平台 	⑪ Wooden Table FootX1 腳板 	⑬ Adjusting PillarX2 支架套筒 	⑮ Towel RailX1 弧形毛巾桿
② Socket PlugX2 內六角接頭 	④ Stainless Steel Wall ScrewX2 不銹鋼螺絲 	⑥ Fixed PostX1 固定基座 	⑧ Stainless Steel ScrewX1 不銹鋼螺絲 	⑩ Adjusting HolderX2 可調整支撐架 	⑫ Hexagon KeyX1 六角板手 	⑭ Hexalobular Socket Flat Head ScrewX2 內六角螺絲 	